



PROJECT
SCHEDULE
NOTES

DATE

LEDI (HBA1) Commercial/ Industrial Round High Bay

- Full feature commercial round high bay
- Lightweight and modern design
- Selectable wattage: 120W, 150W, 200W
 - 120W @ 18,000lm ±10%
 - 150W @ 22,500lm ±10%
 - 200W @ 30,000lm ±10%
- CCT Selectable: 3000K, 4000K, 5000K
- Features premium SMD 2835 LED chips
- Features SOSEN LED driver
- 0-10V dimming feature
- 150lm/W efficacy
- Optional bi-level dimming plug-and-play microwave sensor
- Sensor settings can be changed and saved using the optional infrared remote control - sold separately
- 6-foot black SO cord for quick and easy installation
- Integrated M12 eye bolt for hanging
- High performance, precise optics
- Standard 90° optics, optional 120° optics
- Polycarbonate diffuser lens, low glare
- LM6 aluminum housing featuring a durable polyester powder coating
- Colour Rendering Index Ra80
- Input line voltage: 120-347VAC; 50/60Hz
- Power factor: >0.9
- Ingress protection: IP65
- Impact protection: IK08
- Suitable for damp and wet locations
- Operating temperature: -40°C~50°C
- Operating humidity: Max. 95% RH
- Rated lifespan ≥50,000hours (L80B20 @25°C)
- 5-Year Warranty



© All documentation is subject to change without notice. Please refer to our website for the latest product information and specifications. Please contact us for details.
www.lumenefficientdesign.ca




PROJECT
SCHEDULE
NOTES

DATE

Ordering Instructions

Series	Selectable Wattage (W)	Input Voltage (Vac)	LED Efficacy	Selectable CCT (K)	Beam Distribution	CRI (Ra)	Mounting Style	Options
LEDI HBA1	200CS: 120W-150W-200W	347V: 120-347V	P: 150lm/W	40: 3000K-4000K-5000K	<input type="checkbox"/> W: 120° <input type="checkbox"/> M: 90°	8: 80	N: M12 Eye Bolt	<input type="checkbox"/> X: No Sensor <input type="checkbox"/> MW: Plug & Play Microwave Sensor

Weight and Dimensions

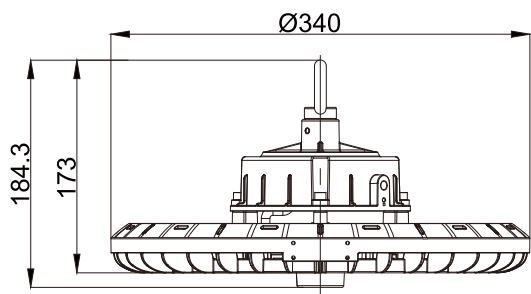

Product Dimensions 340mm x 173mm


Packaging Dimensions 402mm x 402mm x 210mm

Net Weight 3.0kg

Gross Weight 4.9kg


Beam Distribution

W: 120°

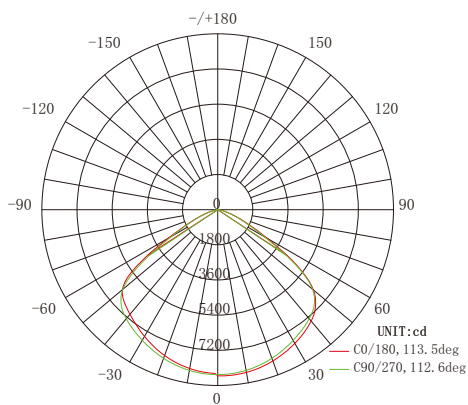

AVERAGE BEAM ANGLE(50%):113.1 DEG

M: 90°

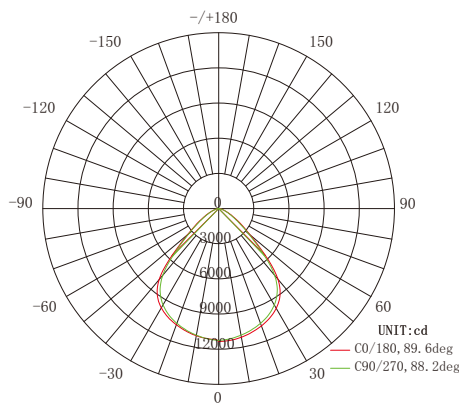

AVERAGE BEAM ANGLE(50%):88.9 DEG






ANT-5-4T



RC-100



INTRODUCTION

The ANT-5-4T is a motion sensor that dims lighting from high to low based on movement. This slim, low-profile sensor is designed for installation inside the bottom of a light fixture body.

The sensors use microwave sensing technology that reacts to changes in movement within the coverage area. Once the sensor stops detecting movement and the time delay elapses lights will go from high to low mode and eventually to an OFF position if it is desired. Sensors must directly “see” motion of a person or moving object to detect them, so careful consideration must be given to sensor luminaire placement and lens selection. Avoid placing the sensor where obstructions may block the sensor’s line of sight.

SPECIFICATIONS

Power supply	12V–24V DC, >50mA
Dim control output	0-10V, max. 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Detection radius	20%/50%/75%/100%(1-8m)
Mounting height	Max 50ft.(15meters)
Time setting	10s/1min/5min/10min/15min/20min/30min/60min
Light-control	24H/10LUX/30LUX/50LUX
Temperature	-4°F ~ +140°F (-20°C ~ +60°C)
IP rating	IP65

⚠ WARNING


NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 5min, Daylight sensor is ☀, Dimming level: 30%, Dimming time: 60minutes.


NOTE: Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

CORRIDOR FUNCTION


This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100%-->dimmed light (natural light is insufficient) -->off; and 2 periods of selectable waiting time: motion hold-time and stand-by period; Selectable daylight threshold and freedom of detection area.



With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on the light automatically when presence is detected.



After hold-time, the light dims to stand-by level if the surrounding natural light is below the daylight threshold.




Light switches off automatically after the stand-by period elapses.




DAYLIGHT SENSOR FUNCTION


Open the daylight sensor by push **(M)** when remote control is in setting condition.



The light switches on at 100% when there is movement detected.




The light dims to stand-by level after the hold-time.




The light remains in dimming level at night.

Settings on this demonstration:
 Hold-time: 30min
 Setpoint on: 50lux
 Setpoint off: 300lux
 Stand-by Dim: 10%
 Stand-by period: +∞
 (when the smart photocell sensor open, the stand-by time is only +∞)


1 ↔ **3** goes in cycle at night ...
 100% on when movement detected, and dims to 10% in long absence.



When the natural light level exceeds setpoint off to light, the light will turn off even if when the space is occupied.



The light automatically turns on at 10% when natural light is insufficient (no motion).

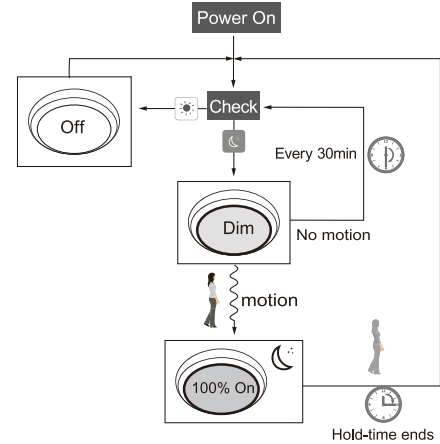

SENSOR COVERAGE

