

Version	2.0	Date	6/24/2021
Prepared By	C.L.		

PRODUCT SPECIFICATION			
Category	Post Top		
Item Number	9571		
Stock Code	FX15PST34SW/8CCT3/BK		
Mounting	Pole - Fits 2 3/8" Tenon		
Housing Color	Black		
PICTURE			


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	34 / 28 / 20	Replacement Wattage (W)	150
Tested Wattage (W)	34		
Input Voltage (V)	100 ~ 277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	4KV
Input Current (A)	0.28 (@120V)	Dimmable	0 ~ 10V
Power Factor	>0.9	AUX (12V) Line	No
THD	≤ 20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	5100 / 4200 / 3000	CCT (K)	3000 / 4000 / 5000
Efficacy (lm/w)	150	Beam Angle (°)	110
CRI	> 80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-40°F ~ 122°F
Storage Temperature (°F)	-40°F ~ 158°F
IP Rating	IP65
Rated Life	50000
Warranty	5 Years

ACCESSORIES		
Item #	Stock Code	Description
P10389	SPD-L-10KV-277	10KV surge protector - 120 ~ 277V
P10390	SPD-L-20KV-277	20KV surge protector - 120 ~ 277V

PRODUCT DIMENSIONS		
Width- in (mm)	15"	(380mm)
Height- in (mm)	21.65"	(550mm)
Depth- in (mm)	15"	(380mm)
EPA (ft²)	0.582	
Weight (lbs)	8.8	
Mounting Height (ft)	8 ~ 15	
Cable Length (ft)		

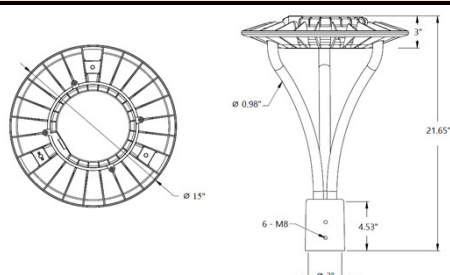

Technical drawings of the light fixture showing top, side, and detail views with dimensions:

- Top view: Circular fixture with a diameter of 15". It features a central circular opening and a ring of 12 mounting points. A detail view shows a mounting point with a diameter of 0.98" and a 15° angle.
- Side view: Shows the fixture's height of 21.65". The mounting arm has a diameter of 0.98". The base has a diameter of 3" and a mounting hole with a diameter of 0.98". The base is labeled "6-MB".

QUALIFICATIONS							
UL/ETL	ETL/CETL	CEC		LM79		IES File	✓
NSF/ETL Sanitation		JA8		LM80	✓	Dimmer List	
Energy Star		FCC	✓				
DLC		RoHS	✓				

COMMENTS