



ESD-340M (AM103)

347V T12 Rapid Start Ballast

Application and Performance Specification

Ballast Type	Electronic	Ballast Factor	High
Starting Method	Rapid Start	Minimum Starting Temp.	-30°C / -22°F
Lamp Connection	Series	Approvals Class	UL / cUL Listed, Class P UL Type 1 Outdoor
Lamps Operated	1 or 2		
Input Voltage	347VAC; 50/60Hz	Warranty	5 Years $t_c \leq 75^\circ\text{C}$ 3 Years $75^\circ\text{C} < t_c \leq 90^\circ\text{C}$
EMI / RFI Compliance	FCC Part 18-A		
Sound Rating	Class A	Safety	Auto-Reset Shutdown Circuit Surge Protected Type HL No PCBs DOE Energy Verified NRCAN Energy Verified

Electrical Data

Lamp Type	Lamps Operated	Line Voltage	Input Watts*	Nominal Line Amps	Ballast Factor	Power Factor	THD	Crest Factor
F40T12	2	347	70	0.20	0.86	0.99	10%	1.70
	1		40	0.12	0.88	0.98	15%	
F34T12	2	347	62	0.18	0.86	0.99	10%	1.70
	1		38	0.11	0.88	0.97	20%	
F30T12	2	347	60	0.17	0.85	0.99	10%	1.70
	1		36	0.10	0.95	0.99	10%	

* ANSI measured wattage; 25°C ambient; bench top

Application and Performance Specification Information is subject to change without notification.

Wiring Diagram

Mechanical Data

Black	18.80"	48.00 cm	Overall Length (L)	9.50"	24.10 cm
White	18.80"	48.00 cm	Width (W)	1.70"	4.30 cm
Blue	30.90"	78.50 cm	Height (H)	1.20"	3.05 cm
Red	30.90"	78.50 cm	Mounting (M)	8.90"	22.6 cm
Yellow	46.40"	118.00 cm	Case Quantity	30	
			Net Weight	39.02 lbs	17.70 kg
			Gross Weight	41.23 lbs	18.70 kg






ESD-340M (AM103)

347V T12 Rapid Start Ballast

Wiring Diagram

Mechanical Data

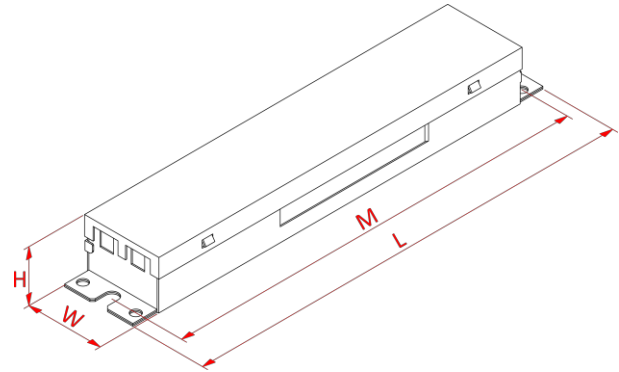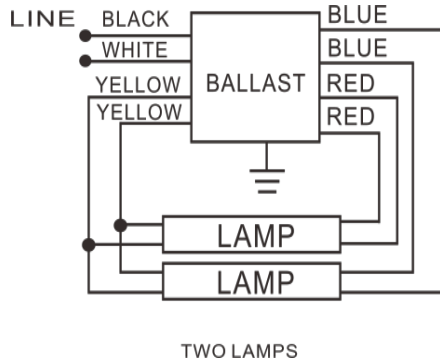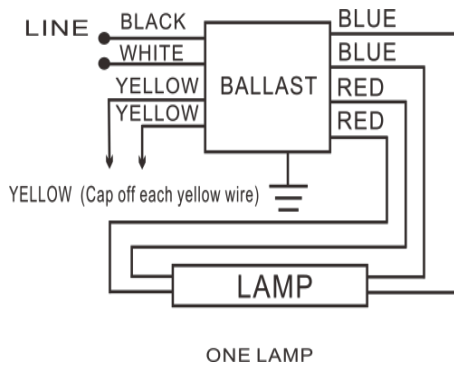

Maximum wiring distance (at full load) is 18AWG/18'
Ballast must be grounded

Install in accordance with the National Electrical Code

