

CSD-B42KITS (AM54)

347V PLT/PLL Program Start Ballast Kit

Application and Performance Specification

Ballast Type	Electronic	Ballast Factor	High
Starting Method	Program Start	Minimum Starting Temp.	-30°C / -22°F
Lamp Connection	Series	Approvals Class	UL / cUL Listed, Class P UL Type 1 Outdoor
Lamps Operated	1 or 2		
Input Voltage	347VAC; 50/60Hz	Warranty	5 Years $t_c \leq 75^\circ\text{C}$ 3 Years $75^\circ\text{C} < t_c \leq 90^\circ\text{C}$
EMI / RFI Compliance	FCC Part 18-A		
Sound Rating	Class A	Safety	Auto-Reset Shutdown Circuit End-of-Life Lamp Protection Surge Protected Type HL No PCBs CAN ICES-005 (A)

Electrical Data

Lamp Type	Lamps Operated	Line Voltage	Input Watts*	Nominal Line Amps	Ballast Factor	Power Factor	THD	Crest Factor
PLT42W	2	347	94	0.28	0.91	0.98	10%	1.70
	1		48	0.14	0.99	0.96	30%	
PLT32W	2	347	70	0.20	0.92	0.98	15%	1.70
	1		36	0.10	0.99	0.91	50%	
PLT26W	2	347	60	0.18	1.00	0.97	15%	1.70
	1		31	0.09	1.00	0.88	60%	
PLL40W	2	347	88	0.26	0.91	0.99	10%	1.70
	1		44	0.13	0.91	0.95	35%	
PLL39W	2	347	68	0.20	0.61	0.98	15%	1.70
	1		36	0.10	0.67	0.92	40%	
PLL36W	2	347	70	0.21	0.88	0.97	15%	1.70
	1		35	0.10	0.89	0.92	45%	
PLL55W	1	347	47	0.15	0.69	0.94	20%	1.70
PLL50W	1	347	47	0.14	0.78	0.95	20%	1.70

* ANSI measured wattage; 25°C ambient; bench top; lamps base up

Application and Performance Specification Information is subject to change without notification.



CSD-B42KITS (AM54)

Wiring Diagram



Lead Length (Kit)

Black	9.00"	23.00 cm
White	9.00"	23.00 cm
Green	9.00"	23.00 cm
Red	9.00"	23.00 cm
Blue	9.00"	23.00 cm
Yellow	9.00"	23.00 cm

347V PLT/PLL Program Start Ballast Kit

Mechanical Data

Overall Length (L)	5.00"	12.70 cm
Width (W)	3.00"	7.70 cm
Height (H)	1.34"	3.40 cm
Mounting (M)	4.60"	11.70 cm
Case Quantity	20	
Net Weight	15.65 lbs	7.10 kg
Gross Weight	17.86 lbs	8.10 kg

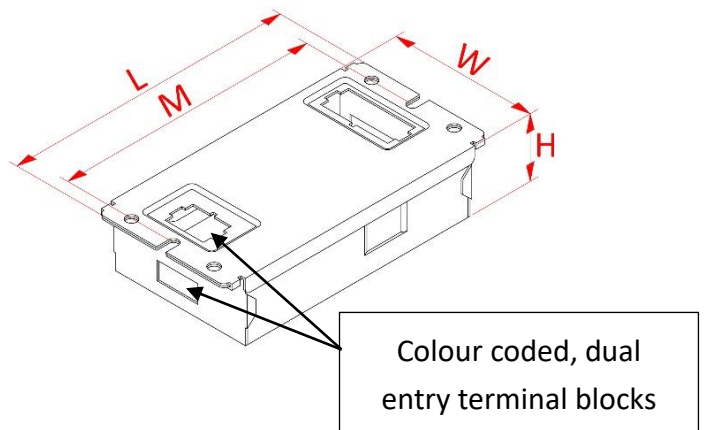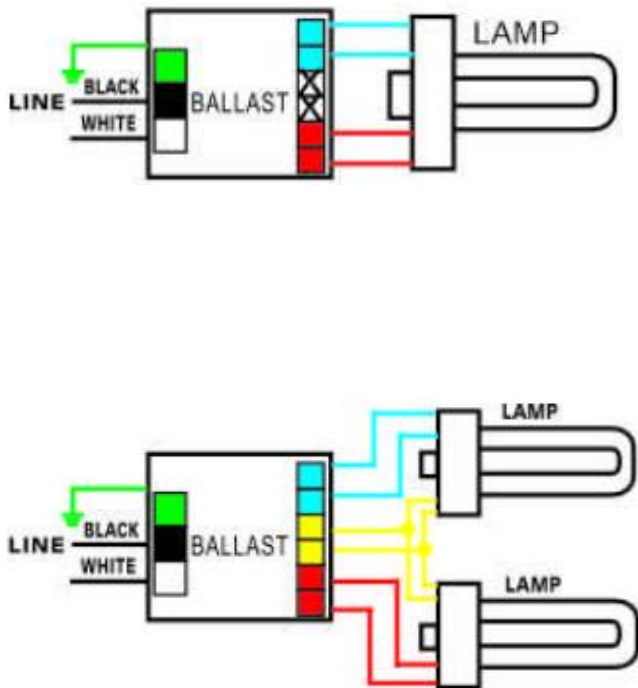

Mounting Plate with Studs

Extending Wire Set

Wire Extraction Tool

Hardware



