



**PT02**


**LED Post Top**

Provides A Unique, Acalable Lighting Solution Targeted For Outdoor Use


# Flip-Up Cover Design With 4 Mounting Options

## Features


- Innovative Optic Selectable capability accomplished 3 different distribution (T3/T4/T5) in one fixture.
- Three mounting brackets allow pole mount, wall mount, and direct mount installations.
- High efficacy up to 150lm/W.
- 3CCT and 4 Wattages Selectable offer SKU reduction.

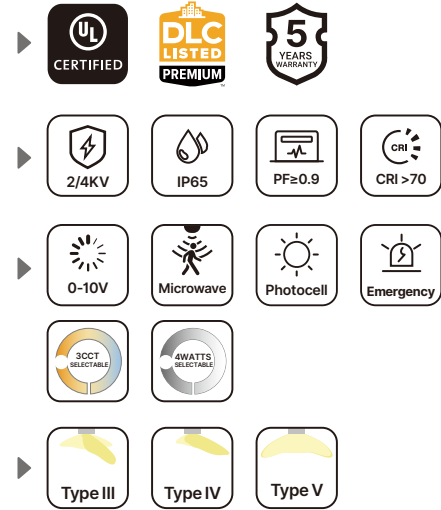

## Dimensions

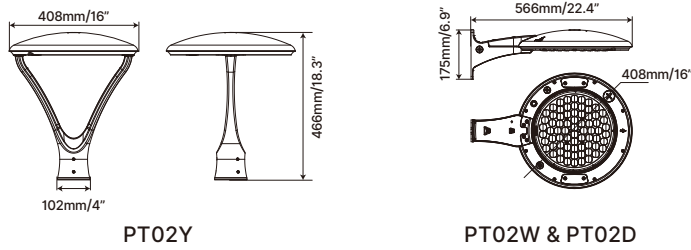

## Installation

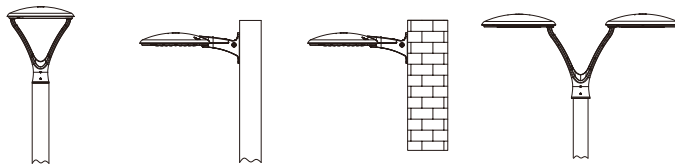

## Accessories



Code	Watt	Lumen	Efficacy	Beam Angle	Voltage	CCT
PT02-80	80W	10,800lm@5000K	150lm/W	T3/T4/T5 Selectable	AC120-277V	3CCT selectable: 3000K/4000K/5000K
PT02-120	120W	16,200lm@5000K	150lm/W		AC120-347V	
PT02-150	150W	20,250lm@5000K	150lm/W			
PT02-80	80W	10,800lm@5000K	150lm/W	T5	AC120-277V	3CCT selectable: 3000K/4000K/5000K
PT02-120	120W	16,200lm@5000K	150lm/W		AC120-347V	
PT02-150	150W	20,250lm@5000K	150lm/W			

Remarks: All above efficiency please check IES files for accurate data.

