

PENDANT LIGHT (PCL)

Project _____
 Schedule _____ Date _____
 Notes _____

DESCRIPTION

naturaLED® Pendant Light (PCL) fixture is a versatile and high performance fixture offering both precision lighting and elegant style and can be used for any new constructions, remodel, or retrofit projects. Adjustable mounting for flat or sloped ceiling, which also includes pendant pole of 12” length or extension to 24” length. This classic cylindrical design with frosted lens allowing a modern look with a warm glow illuminating for both residential or commercial use.



Flat and Sloped Ceiling Mounting



FEATURES

- Energy Star Certified
- For Wet Location
- ETL
- Excellent thermal design
- Easy installation
- Surge protection: 3.75KV
- Input line voltage: 120-277V
- Power Factor: >0.95V
- Voltage Frequency (Hz) 50/60
- CRI: 90
- THD: <10%
- Beam Angle: 33°
- 50,000 rated life hours
- Operating temperature: -4°F-122°F

INCLUDED WITH PENDANT

- Mounting Pole



APPLICATIONS

- Architectural Lighting
- Perimeter Lighting
- Commercial Lighting
- Pathway Lighting

WARRANTY

- 5 Year Warranty

Ordering Information		EXAMPLE: LED-FX4PCL18/33/930/BK					
LED	FX	4	PCL	18	33	930	BK
	Category	Diameter	Style	Wattage	Beam Angle	CRI/ Color Temp	Color Finish
LED	FX Fixture	4 4.5-inch	PCL Ceiling Pendant	18 18 Watts	33 33°	9 CRI 90 30 3000K	BK Black

ORDERING


Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Color	Voltage	Beam Angle	Mount	Wet Location	ES
18	7794	LED-FX4PCL18/33/930/BK	3000K	1,300	100W	Black	120-277	33°	Pendant	•	•

MOUNTING / ACCESSORIES

Mounting Pole (Included)






2 x Mounting pole (12 inch each)

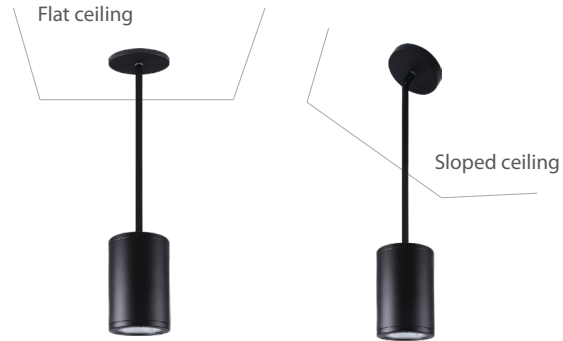

SPECIFICATIONS

Pendant


Weight: 2.65-lbs

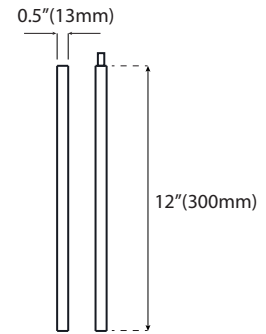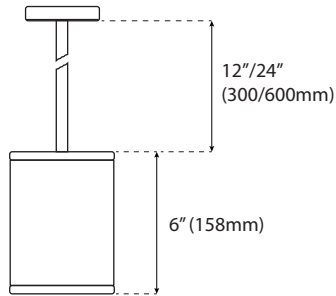

Mounting pole x 2

PHOTOMETRICS CHART

Pendant - 18W

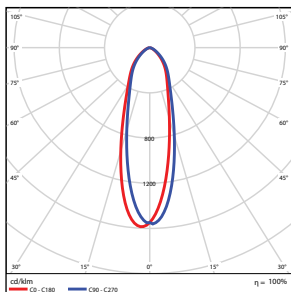

Center Beam fc	Beam Width	
	Vertical	Horizontal
5.0ft	11.3 ft	2.8 ft 2.8 ft
10.0ft	28.3 ft	5.5 ft 5.6 ft
15.0ft	12.6 ft	8.3 ft 8.4 ft
20.0ft	7.08 ft	11.1 ft 11.1 ft
25.0ft	4.53 ft	13.8 ft 13.9 ft
30.0ft	3.15 ft	16.6 ft 16.7 ft

■ Vert. Spread: 31.0°
■ Horiz. Spread: 31.1°

PACKAGE

Master Pack: 6 pcs

