naturaled®
Turning Light into Savings

CUTOFF WALL PACK (CWP)

Project

Schedule Date

Notes

DESCRIPTION

naturaLED® (CWP) full cut-off wallpack comes in rugged cast-aluminum housing with excellent thermal design. Our CWP product offers a popular but classic appearanace with sleek angle design. Delivering up to 7,000 lumens with two wattages option: 40W or 60W. Replacing up to 400 watt metal halide luminaires and provides energy saving up to 72%. Our CWP is ideal for outdoor applications such as carports, loading areas, driveways, parking areas, and pathways. Suggested for wall mounting minimum above four feet from ground.

5 YEAR WARRANTY

IP65 rated

DLC PREMIUM · IP65 · 0-10V DIMMING · TITLE 24 · cULus · FC · LM 79 · LM 80 · RoHS Compliant

FEATURES

- DLC Premium
- IP65 rated
- UL/cUL listed
- Long Life LED chips
- Uniform and consistent color
- Excellent thermal design
- 15-30 foot height performance
- Die-cast aluminum housing
- Voltage: 120-277V
- Dimmable: 0-10V
- THD<20
- Input current: 0.34A
- Power Factor >0.9
- Surge protect level: 4KV
- CRI: 70
- Operating temperature: -40°F ~ 122°F
- Rated 50,000 hours average life

ACCESSORY

Button Photocell

Emergency Driver

APPLICATIONS

- Area Lighting
- Security Lighting
- Pathway Lighting
- Perimeter Lighting
- Entryway Lighting

WARRANTY

- 5 Year Warranty

COLOR

Bronze

Ordering Information	EXAMPLE: LED-FXCWP40/40K/BZ				
LED	**FX**	**CWP**	**40**	**40K**	**BZ**
LED	Category **FX** Fixture	Series **CWP** Cut Wall Pack	Wattage **40** 40W	Color Temp **40K** 4000K	Color **BZ** Bronze

© 2020 naturaLED® All rights reserved

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Voltage	Equiv. Wattage (W)	Rated Hrs	IP65 Rated	DLC (S/P)
40	9319	LED-FXCWP40/40K/BZ	4000K	4,861	120-277V	250	50,000	•	P
40	9320	LED-FXCWP40/50K/BZ	5000K	4,861	120-277V	250	50,000	•	P
60	9208	LED-FXCWP60/40K/BZ	4000K	7,347	120-277V	250-400	50,000	•	P
60	9209	LED-FXCWP60/50K/BZ	5000K	7,482	120-277V	250-400	50,000	•	P

ACCESSORIES

SOLD SEPARATELY

Photocell

- **P10036 SEN-PHO-BT-MT/MV**

(Button Photocell 120-277V)

Emergency Driver

- **7334 BAEM15-48BC/MV-A**

(LED Emergency Backup Driver 120-277V)

SPECIFICATIONS

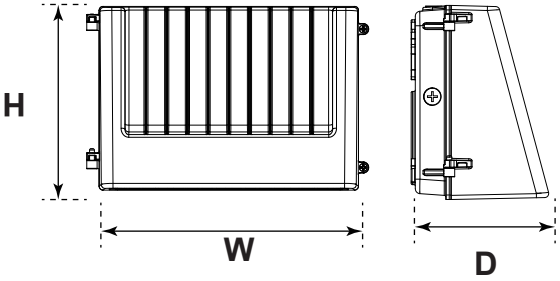

Wattage	Height(H)	Width (W)	Depth (D)	Weight
40W	9.25” (235mm)	14.2” (360mm)	6.5” (166mm)	6.85 lbs
60W	9.25” (235mm)	14.2” (360mm)	6.5” (166mm)	7.05 lbs

PHOTOMETRICS CHART

FXCWP (40 Watt)





FXCWP (60 Watt)





PACKAGE

Master Pack: 1 pc



© 2020 naturaLED® All rights reserved